



# Environmental Product Declaration

In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

## ***Sanded Decorative Coating / Paint***

From  
Valpaint S.p.a.



Products included:

- SABULADOR LUX
- SABULADOR MATT
- SABULADOR SOFT 100
- SABULADOR SOFT GECKO

This is an EPD of a multiple-products series, based on a representative product

Programme:	The International EPD System, <a href="http://www.environdec.com">www.environdec.com</a>
Programme operator:	EPD International AB
Type of EPD:	EPD of multiple products from a company
EPD registration number:	EPD-IES-0026927:001
Version date	2025-12-17
Validity date:	2030-11-19

*An EPD may be updated or depublished if conditions change. To find the latest version of the EPD and to confirm its validity, see [www.environdec.com](http://www.environdec.com)*



## GENERAL INFORMATION

Programme Information	
<b>Programme:</b>	The International EPD® System
<b>Address:</b>	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
<b>Website:</b>	<a href="http://www.environdec.com">www.environdec.com</a>
<b>E-mail:</b>	<a href="mailto:support@environdec.com">support@environdec.com</a>

### Product Category Rules (PCR)

**CEN standard EN 15804 serves as the Core Product Category Rules (PCR)**

**Product Category Rules (PCR):**

*PCR 2019:14 construction products (EN 15804:A2) version 2.0.1 + CEN standard EN 15804 + A2*

PCR Review was conducted by the Technical Committee of the international EPD System. Chairs of the PCR Review, Rob Rouwette (Chair) and Noa Meron (Co-chair).

### Third-party Verification

Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:

**Individual EPD verification without a pre-verified LCA/EPD tool**

Third Part Verifier: Bureau Veritas Italia S.p.A., Viale Monza, 347,  
20126 Milano (MI)

Accredited by: ACCREDIA - Accreditation certification N. 00031VV

Procedure for follow-up of data during EPD validity involves third party verifier:

Yes       No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but published in different EPD programmes, may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison.

For further information about comparability, see EN 15804 and ISO 14025

# INFORMATION ABOUT EPD OWNER

Owner of the EPD: Valpaint S.p.A.

Address: Via dell'Industria, 80, 60020 Polverigi (Ancona – Italy)

Contact: Mirco Cesaretti - VALPAINT S.p.A. - [mirco.cesaretti@valpaint.it](mailto:mirco.cesaretti@valpaint.it)

Address and contact information of the LCA practitioner commissioned by the EPD owner:

Dr. Alessandra Cecchini - Manifaktura S.r.l. – Str. della Campanara 3/1 - 61122 Pesaro Italy.

Description of the organisation:

VALPAINT was officially established in 1988 and became a joint-stock company (S.p.A.) in 2004. Its origins date back to 1974 when Ferdinando Sarti, still the company's President, started a small business in the paint sector.

VALPAINT TUNISIE is the production subsidiary located in Zaghouan, 70 km from Tunis, where the same decorative paints have been produced for the North African markets with the same technical specifications and the same quality level since 2001.

The VALPAINT brand is operates in many countries in Europe and around the world, either with its own subsidiaries or companies belonging to the Group:

VALPAINT ESPAÑA S.L. - Burgos (Spain)

VALPAINT DESIGN D.O.O.:

- Sarajevo (Bosnia Herzegovina)
- Podgorica (Montenegro)
- Zagreb (Croatia)

70% of turnover abroad; exports to over 60 countries; over 800 dealers and distributors/importers in Italy and worldwide.

VALPAINT is considered one of the most technologically advanced industries thanks to the dynamic activity of its Research and Development Laboratory.

The product development process takes advantage of the most advanced scientific methods to offer consumers the very best in **QUALITY** and **PERFORMANCE**.

At VALPAINT, R&D activities are driven by a desire for continuous improvement.

In 2006 we obtained the ISO 9001 Quality certification, which was followed by the ISO 14001 environmental certification for our environmentally friendly production processes in 2009.

But there is more:

- With VALPAINT's industrial water purifier the waste of water resources is reduced and only purification sludge is disposed of in landfills. Purified water is used in our washing plant, significantly reducing the amount of water taken from the water mains;
- since 2019 we have increased the energy efficiency of our plant with the installation of a photovoltaic system.
- VALPAINT cans are Plastic Second Life certified, as at least 40% of the plastic used is recycled, traced, and complies with the quality requirements established by the Italian Institute of Plastics (IIP).
- VALPAINT catalogues and product labels are made from FSC paper. FSC paper is certified by the Forest Stewardship Council, an international non-governmental organization that promotes responsible forest management worldwide. The FSC certification guarantees that the paper is produced from sustainably managed forests, respecting the environment, local communities, and workers' rights;
- the inks used by our suppliers for printing VALPAINT catalogues are plant-based to ensure a more sustainable future.

VALPAINT has embarked on an innovative and sustainable initiative by collaborating with a startup focused on protecting bees through the use of technology. The goal of the project is to promote environmental sustainability and raise public awareness about the importance of bees for the

ecosystem. The project is part of VALPAINT's broader commitment to sustainable and environmentally friendly business practices.

VALPAINT produces a wide range of decorative paints that respect the environment and human health, both in the liquid phase (chemical analyses performed on paints in liquid state) and in terms of indoor emissions.

The vast majority of VALPAINT products:

- are certified in class A+ according to French Decree No. 2011-321
- are awarded the Japanese Four Star certification for formaldehyde emissions measured according to the strict JJS A 1902-3 standard.
- have a low VOC (volatile organic compounds) contents
- comply with the strict German AgBB/ABG and Blue Angel standards, as only raw materials that allow this result to be achieved are selected during the development phase.
- do not contain polycyclic aromatic hydrocarbons (PAHs), alkylphenol ethoxylates (APEOs), ammonia, formaldehyde, or heavy metals to ensure maximum safety for users and the environment.
- are not classified as toxic according to Regulation (EC) 1272/2008 (CLP).

Renewable raw materials come from plants rather than fossil sources, and recycled raw materials help to close the life cycle of a substance: the waste product of a specific sector becomes the raw material for another activity.

The company is a model of excellence in the decorative paint sector, demonstrating how innovation and sustainability can go hand in hand. Our goal is to become completely sustainable; to this end, we invest in innovative technologies and collaborate with suppliers committed to reducing their environmental impact.

With its green products and constant commitment to sustainable production practices, VALPAINT offers high-quality decorative solutions, while contributing to protecting the planet.

Product-related or management system-related certifications:

- ISO 9001
- ISO 140001

# PRODUCT INFORMATION

Product name: **Sanded Decorative Coating / Paint**

Product identification:

The EPD hereby refers to a range of water based Decorative Coating paints for interiors with special luminescent sandy reflections

The complete list and the description is show in the table below:

Product	Size	Density (gr/l a 25°C)	yield (m <sup>2</sup> /lt)
<b>SABULADOR LUX</b> (representative product)	• 1 L • 2,5 L	1.380 ± 30	8-9
<b>SABULADOR MATT</b>	• 4 L	1.330 ± 30	8-9
<b>SABULADOR SOFT 100</b>	• 5 L	1.100 ± 30	8-9
<b>SABULADOR SOFT GEESO</b>		1.120 ± 30	3-4

UN CPC code:

35110 Paints and varnishes and related products

Product description:

## **SABULADOR LUX (representative product):**

SABULADOR LUX is decorative water-based painting for interiors (yield 8-9 m<sup>2</sup>/lt) able to create a luminous effect with special luminescent sandy reflections due to siliceae based material to the coating. The product is the one that identifies, by its own chromatic characteristics, all the product line for the market; therefore is considered representative for all sandy painting.

## **SABULADOR MATT**

The product a is decorative water-based painting for interiors (yield 8-9 m<sup>2</sup>/lt) able to create a luminous effect with special luminescent sandy reflections due to siliceae based material to the coating. The painting material blend, differently from lead product SABULADOR LUX, is designed to give a sandy matt lighting effect

## **SABULADOR SOFT 100**

Decorative water-based painting for interiors (yield 9-10 m<sup>2</sup>/lt) able to create a luminous effect with special luminescent sandy reflections. The lighting effect is fainter compared do lead product SABULADOR LUX. The painting is also completely washable and overpaintable with any other water-based paint.

## **SABULADOR SOFT GEESO**

SABULADOR SOFT chromatic variant for a chalky (gypsum) effect

All products in the Water-based Sanded Decorative Coating / Paint family are available in packaging sizes of **1, 2.5, 4, and 5 litres**. However, the representative product studied in this EPD is **1 kg of SABULADOR LUX**, which is used as the declared unit for the life-cycle assessment.

Name and location of production site(s):

VALPAINT S.p.A. - Via dell'industria, 80 - 60020 Polverigi (AN) - ITALY

Producer website: <https://www.valpaint.it/>

# CONTENT DECLARATION

The mass (weight) of one unit of a product, as purchased or per declared unit:

*1 kg of sanded paint (Sabulador Lux), manufactured by Valpaint S.p.A.*

Content of the product (see Table below):

<b>Product content Sabulador Lux</b>	<b>Mass [Kg] Sabulador Lux</b>	<b>Post-consumer recycled material, mass- % of product</b>	<b>Biogenic material, mass- % of product</b>	<b>Biogenic material, kg C/product or declared unit</b>
Water	0.4867	0	0	0
Dispersions and resins	0.3500	0	0	0
Fillers	0.0300	0	0	0
Pigments	0.0700	0	0	0
Solvents	0.0300	0	0	0
Salts and simple substances	0.0005	0	0	0
Additives	0.0328	0	0	0
<b>TOTALE</b>	<b>1.0000</b>	<b>0</b>	<b>0</b>	<b>0</b>

The 1.0-liter bucket is the company's best-selling packaging format and is therefore used as the reference unit in this EPD.

<b>Packaging materials</b>	<b>Mass, kg</b>	<b>Mass-% (versus the product)</b>	<b>Biogenic material, kg C/product or declared unit</b>
Corrugated board	0.0230	2.30	0.012
Packaging film	0.0038	0.38	0
Recycled plastic paint bucket	0.0590	5.90	0
EUR-flat pallet	0.0238	2.38	0.0119
<b>TOTAL</b>	<b>0.1096</b>	<b>10.96%</b>	<b>0.0239</b>

1 kg biogenic carbon in the product/packaging is equivalent to the uptake of 44/12 kg of CO<sub>2</sub>.

Other information on substances with hazardous and toxic properties:

*Preservatives (CIT/MIT, BIT) are present in concentrations below 0.1% w/w, in compliance with EU biocidal products regulation. No other hazardous substances are present in significant concentrations.*

## LCA INFORMATION

Declared unit : 1 kg of *Sanded Decorative coating / paint Sabulador Lux* manufactured by Valpaint  
This EPD covers multiple products with results based on a representative product from the Valpaint family of *Sanded Decorative coating / paint*

Product Representativeness:

The representative product is **SABULADOR LUX** which is the one with the highest production volume compared to product line.

Conversion factor to mass if mass is not used as functional/declared unit: 1 Kg = 0.72 L = 5,80 m<sup>2</sup>

Reference service life: RSL is not relevant for this EPD

Time representativeness: Primary, site-specific data were collected at VALPAINT's manufacturing site and cover the period 01/01/2024–31/12/2024.

Geographical scope: The geographical scope of this EPD is Global

Database(s) and LCA software used: The Life Cycle Assessment was modelled in SimaPro (v10.2.0.3 Analyst). Background data were sourced from Ecoinvent (v311) for environmental performance indicators: 15804 + A2 based on EF 3.1 characterisation factor

Description of system boundaries:

Cradle-to-gate (A1-A3)

Declared modules:

- A1 Raw material supply: extraction, production and supply of raw materials, including upstream processes and precursors used in the formulation of Sabulador Lux
- A2 Transport: average transport of raw materials to the Valpaint production plant, modelled with weighted average distances and vehicle classes based on supplier data.
- A3 Manufacturing: mixing and dispersion of raw materials, use of auxiliaries (additives, dispersants, thickeners, preservatives), electricity and process water, packaging operations, on-site emissions to air and water, and waste management. Quality control operations are included.


As permitted by PCR 2019:14 Construction products, version 2.0.1, the remaining life cycle stages (modules A4–A5, B1–B7, C1–C4, and D) have been excluded from the study, as the analysed products meet the following conditions:

- The product or material is physically integrated with other products during installation and therefore cannot be physically separated from them at the end of life;
- The product or material is no longer identifiable at the end of life due to a physical or chemical transformation process;
- The product or material does not contain biogenic carbon;
- The EPD is not intended for business-to-consumer communication.

\* Electricity mix: The electricity used in the production process (phase A1-A3) was modelled using the national Residual Mix provided by the AIB (Association of Issuing Bodies) for a share of 94.5%, and by the photovoltaic system for 5.5%. The GWP-GHG of the electricity mix is equal to: **0.61** kg CO<sub>2</sub>eq./kWh

Cut-off: coverage  $\geq 99\%$  of mass and energy;

Process flow diagram:

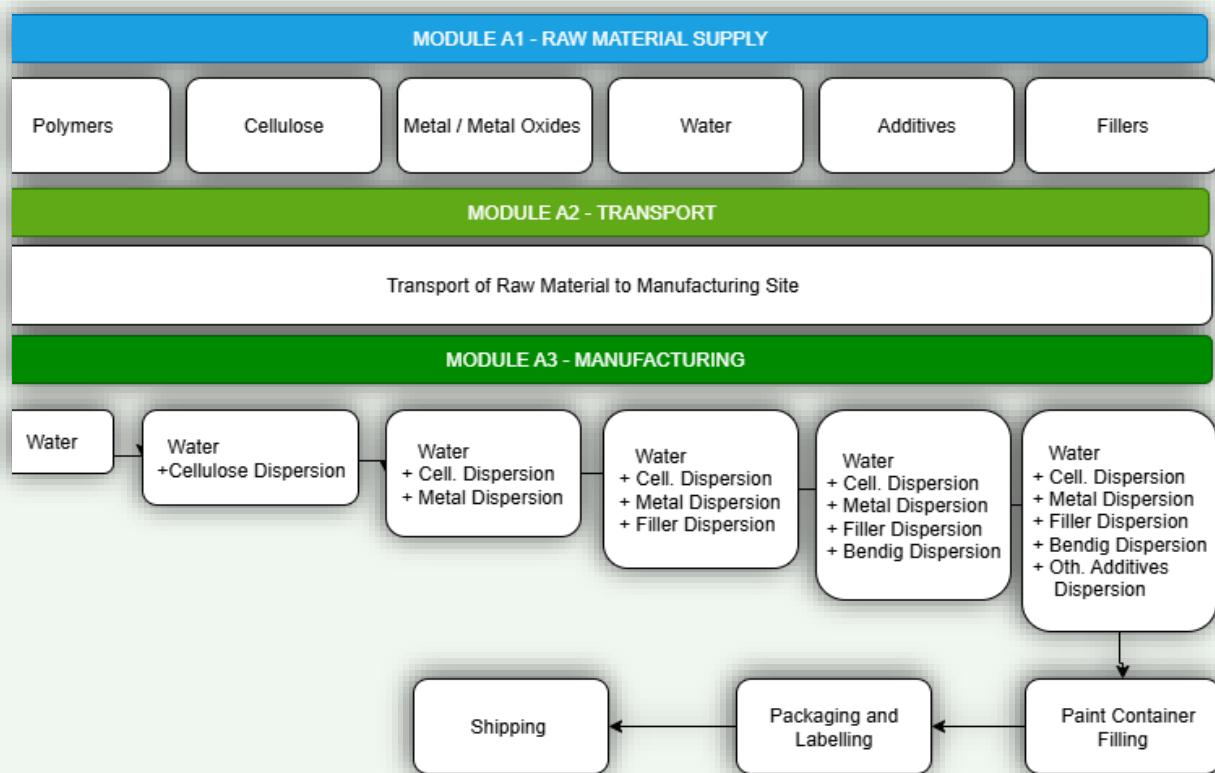

Data source and representativeness:

A summary of the data quality assessment, in line with requirements of PCR in Section 4.6.4. is listed below. The share of primary data is calculated based on GWP-GHG results.

The EPD covers the *Sanded Decorative Coating / Paint* from Valpaint factory in Polverigi Marche, Italy, which provided data for the period 2024-01-01 to 2024-12-31. The product is manufactured through a complete paint manufacturing process, including mixing and packaging.

Background data was sourced from the Ecoinvent 3.11. The data quality assessment is based on EN15804 Annex E Table E-1. In general, time representation of the dataset's selection is very good for the studied product, the technical representation is good, the geographical representation is good.

No poor or very poor data was found during the assessment of relevant data.

Process	Source type	Source	Reference year	Data category	Share of primary data, of GWP-GHG results for A1-A3
Generation of electricity used in manufacturing of product	Collected data Database	Valpaint Ecoinvent v3.11	2024	Primary Data	6.24 %
transport of raw materials to plant	Collected data Database	Valpaint Ecoinvent v3.11	2024	Primary data	16.78%
Packaging (LDPE, cardboard, pallet, film)	Collected data Database	Valpaint Ecoinvent v3.11	2024	Primary data	4.50%
Raw materials (binders, fillers, TiO <sub>2</sub> , additives)	Collected data Database	Valpaint Ecoinvent v3.11	2024	Secondary data	0%
Total share of primary data, of GWP-GHG results for A1-A3					27,52%

# ENVIRONMENTAL PERFORMANCE

## LCA results of the product(s) - main environmental performance results

### Mandatory impact category indicators according to EN 15804 (Representative Product)

Results for 1 Kg of declared unit		
Indicator	Unit	A1-A3
GWP-total	kg CO <sub>2</sub> eq	1,10E+00
GWP-biogenic	kg CO <sub>2</sub> eq	-3,96E-03
GWP-fossil	kg CO <sub>2</sub> eq	1,10E+00
GWP-luluc	kg CO <sub>2</sub> eq	1,10E-03
ODP	kg CFC11 eq	7,97E-08
AP	mol H <sup>+</sup> eq	4,05E-03
EP-freshwater	kg P eq	2,70E-04
EP-marine	kg N eq	7,80E-04
EP-terrestrial	mol N eq	7,97E-03
POCP	kg NMVOC eq	4,45E-03
ADPE	kg Sb eq	6,30E-06
ADPF	MJ	2,10E+01
WDP	m <sup>3</sup> depriv.	4,27E-01
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption	

\* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks. The results of the end-of-life stage (modules C1-C4) should be considered when using the results of the product stage (modules A1-A3).

### Additional mandatory and voluntary impact category indicators

Indicator	Unit	A1-A3
GWP-GHG <sup>1</sup>	kg CO <sub>2</sub> eq.	1,10E+00

## Resource use indicators

Results for 1 Kg of declared unit		
Indicator	Unit	A1-A3
PERE	MJ	1,80E+00
PERM	MJ	0,00E+00
PERT	MJ	1,80E+00
PENRE	MJ	2,26E+01
PENRM	MJ	0,00E+00
PENRT	MJ	2,26E+01
SM	kg	3,54E-02
RSF	MJ	0,00E+00
NRSF	MJ	0,00E+00
FW- fresh water	m3	1,24E-02
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water	

## Waste indicators

Results for 1 Kg of declared unit		
Indicator	Unit	A1-A3
Hazardous waste disposed	kg	1,75E-04
Non-hazardous waste disposed	kg	1,35E-01
Radioactive waste disposed	kg	2,02E-05

## Output flow indicators

<sup>1</sup> This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO<sub>2</sub> is set to zero.

## Results for 1 Kg of declared unit

Indicator	Unit	A1-A3
Components for re-use	kg	0,00E+00
Material for recycling	kg	1.32E-02
Materials for energy recovery	kg	0,00E+00
Exported energy, electricity	MJ	0,00E+00
Exported energy, thermal	MJ	0,00E+00

## Additional LCA results (other environmental performance results of the products)

Variations information from the representative product:

LCA result of one declared unit product (A1-A3)	Unit	Min (Sabulador Matt)	Representative (sabulador Lux)	Max (Sabulador soft gesso)
GWP-GHG	kg CO2 eq	1,10E+00	1,10E+00	1,28E+00
GWP-total	kg CO2 eq	1,10E+00	1,10E+00	1,23E+00
GWP-biogenic	kg CO2 eq	-3,96E-03	-3,96E-03	0,00E+00
GWP-fossil	kg CO2 eq	1,10E+00	1,10E+00	1,28E+00
GWP-luluc	kg CO2 eq	1,10E-03	1,10E-03	1,39E-03
ODP	kg CFC11 eq	7,97E-08	7,97E-08	2,90E-08
AP	mol H+ eq	4,05E-03	4,05E-03	6,55E-03
EP-freshwater	kg P eq	2,70E-04	2,70E-04	3,34E-04
EP-marine	kg N eq	7,80E-04	7,80E-04	1,00E-03
EP-terrestrial	mol N eq	7,97E-03	7,97E-03	1,00E-02
POCP	kg NMVOC eq	4,45E-03	4,45E-03	5,23E-03
ADPE	kg Sb eq	6,30E-06	6,30E-06	9,16E-06
ADPF	MJ	2,10E+01	2,10E+01	2,35E+01
WDP	m3 depriv.	4,27E-01	4,27E-01	6,56E-01
PERE	MJ	1,80E+00	1,80E+00	2,10E+00
PERM	MJ	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	1,80E+00	1,80E+00	2,10E+00
PENRE	MJ	2,26E+01	2,26E+01	2,52E+01
PENRM	MJ	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	2,26E+01	2,26E+01	2,52E+01
SM	kg	3,54E-02	3,54E-02	3,54E-02
RSF	MJ	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00
FW - fresh water	m3	1,24E-02	1,24E-02	1,79E-02

## ABBREVIATIONS

All abbreviations used in the EPD must be added. Please add all the abbreviations used.

Abbreviation	Definition
<b>General Abbreviations</b>	
EN	European Norm (Standard)
EF	Environmental Footprint
GPI	General Programme Instructions
ISO	International Organization for Standardization
CEN	European Committee for Standardization
CLC	Co-location centre
CPC	Central product classification
GHS	Globally harmonized system of classification and labelling of chemicals
GRI	Global Reporting Initiative
SVHC	Substances of Very High Concern
ND	Not Declared

## REFERENCES

- a) General Programme Instructions of the International EPD® System, Version 5.0.1, 2024.
- b) EN 15804:2021, Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products.
- c) PCR 2019:14, Construction products, Version 2.0.1, The International EPD® System.
- d) ISO 14040:2006, Environmental management – Life cycle assessment – Principles and framework.
- e) ISO 14044:2006, Environmental management – Life cycle assessment – Requirements and guidelines.
- f) ISO 14025:2006, Environmental labels and declarations – Type III environmental declarations – Principles and procedures.
- g) Central Product Classification (CPC) Version 2.1, United Nations Statistics Division, New York, 2015.
- i) Database: Ecoinvent v3.11, The Ecoinvent Centre, Zurich, 2024.
- j) LCA Study: Life Cycle Assessment "Sanded Decorative Coating / Paint Products – Valpaint" developed in 2025 according to ISO 14040–14044 and EN 15804:2021

## VERSION HISTORY

Original Version of the EPD, 2025-xx-xx

